

抗強酸強鹼鐵氟龍 PTFE 耐高溫藍色束線帶 (耐溫 170 度以上)

PLT1M-M76

PANDUIT 泛達耐輻射束線帶 Tefzel / HALAR cable ties

Ideal for applications requiring resistance to environmental stresses such as chemical attack, gamma radiation, ultraviolet radiation and extreme high and low temperatures

Ideal for use in nuclear power facilities and chemical processing plants and meets the requirements of IEEE 383

Low smoke density and excellent flammability rating of UL 94V-0

One-piece construction for consistent performance and reliability

Lowest threading force of any one-piece cable tie in the industry

Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

For indoor or outdoor use

PANDUIT 汎達耐束線帶 Tefzel / HALAR 紮帶

非常適合需要抵抗環境壓力的應用，例如化學侵蝕、伽馬輻射、紫外線輻射以及極端高溫和低溫
非常適合用於核電設施和化學加工廠，符合 IEEE 383 的要求



UL 94V-0 的低煙密度和出色的可燃性等級

一體式結構，性能和可靠性始終如一

業內任何一件式紮帶中最低的穿線力

彎曲的尖端易於從平面上拾取，並允許更快的初始螺紋以加快安裝速度

適合室內或室外使用

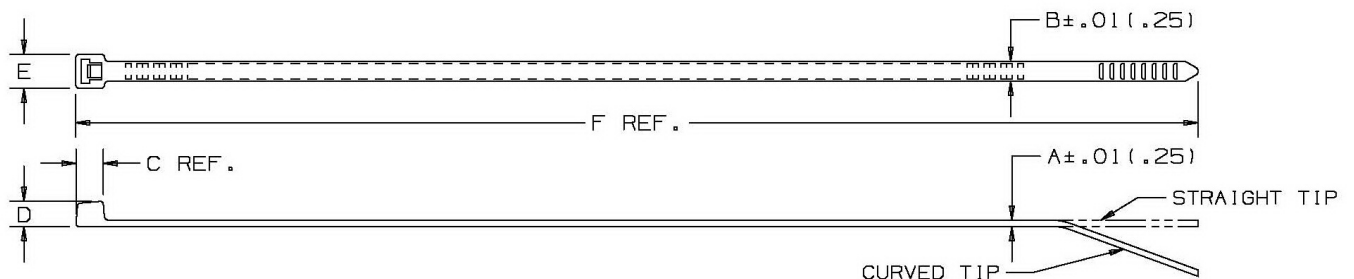

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-76	.13 (3.3)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	CURVED	.09 (42)
PLT2I-76	.13 (3.3)	2.00 (51)	.045 (1.1)	.135 (3.4)	.200 (5.1)	.180 (4.6)	.240 (6.1)	8.0 (203)	25 (111)	INTERMEDIATE	CURVED	.28 (127)
PLT2S-76	.13 (3.3)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	50 (222)	STANDARD	CURVED	.47 (213)
PLT3S-76	.13 (3.3)	3.00 (76)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	CURVED	.78 (352)
PLT4S-76	.13 (3.3)	4.00 (102)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	14.60 (371)	50 (222)	STANDARD	CURVED	.89 (404)
PLT3H-76	.25 (6.4)	3.00 (76)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	11.50 (292)	120 (534)	HEAVY	STRAIGHT	1.5 (687)
PLT4H-76	.25 (6.4)	4.00 (102)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	14.60 (371)	120 (534)	HEAVY	STRAIGHT	1.83 (830)